



ZRM 6-ES/C 3.5kV

Lampen	100W	150W	250W	450W	575W
HI/MBI*	●	●	●	●	●
HS/SON					

*Pulse Start Metal Halide Lamps

Type		ZRM 6-ES/C 3.5kV
Article number		87500097 - 12321
Rated voltage	V	220-240
Permitted input voltage	V	198-264
Mains frequency	Hz	50-60
Ignition voltage	kVp	3.0-4.0
Lamp wattage	W	100-575
Temperature rise at IB = 1.1A (100W)	K	1.8
IB = 3.7A (450W)	K	15
IB = 4.6A (575W)	K	22.2
Losses at IB = 1.1A (100W)	W	0.13
IB = 3.7A (450W)	W	1.53
IB = 4.6A (575W)	W	2.42
Max. cable capacitance	pF	100
Max. distance from lamp	m	1.5
Max. housing temperature tc	°C	105
Min. operating temperature	°C	-30
Weight	kg	0.210

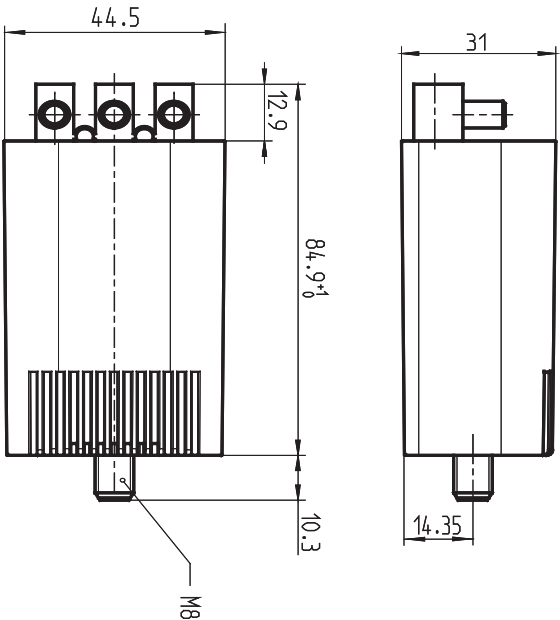

mat.no.:		material:		surface /aftertreatment:					
modifi.no.	modification date	name	general tolerances:		2015	date	name		
1			DATASHEET ZRM 6-ES/C 3.5kV		drawn				
2					approx.				
3					scale	1 : 1			
4									
5					drawing number		F	I	
6					15004483		4	0	
7					european projection		copyright		
8							according to ISO 16016		
9			Ob železnici 14, SI-2000 Maribor						